




## MOA/MSA Optical Amplifier/Seeded Amplifier

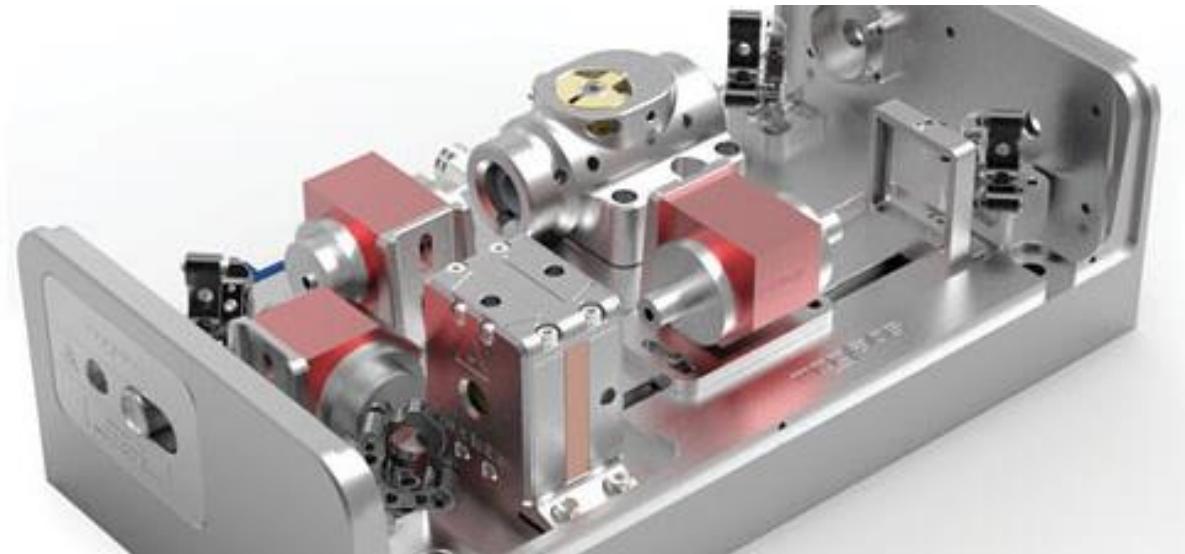

The MOGLabs Optical Amplifier is a high-power extension for single-frequency external cavity diode lasers.

Laser power is increased by up to 4W, while maintaining the tunability and linewidth of the injection seed laser.

Replacement of the amplifier diode and alignment are easily accomplished by the end-user. Options include 35 or 70dB of input isolation and 35dB on the output, and fibre coupling of input or output or both. Wavelength options extend from 630nm to 1064nm, and power from 250mW to 3000mW.

Also available as cateye laser seeded amplifier MSA as shown.

### Features

- Wavelength 630nm – 1064nm
- Output power up to 3W
- Optional input and output Faraday isolators
- Optional input and output fibre coupling
- Simple customer TA diode replacement
- Stable flexure alignment



### Applications

- Laser cooling and trapping
- Bose-Einstein condensation
- Quantum optics: squeezed light
- Electromagnetic transparency and slow light
- Time and frequency standards
- Laser spectroscopy
- Physics teaching labs

# Optical Amplifier/Seeded Amplifier

## Specifications MOA/MSA

Wavelength/frequency	
Wavelength	630nm – 1064nm
Gain bandwidth	10nm to 30nm, wavelength dependent
Power	250mW, 500mW, 1W, 2W, 3W and 4W options, wavelength dependent
Gain	Up to 23dB (200x)
Seed input power	10mW to 30mW, depending on amplifier diode
ASE suppression	>45dB
Optical	
Beam diameter ( $1/e^2$ )	Typically 1.8 x 3.0 mm, wavelength dependent
Beam quality	$M^2$ from 1.1 to 1.7
Beam divergence	<1.5 mrad (630 – 670nm: <2.5 mrad)
Polarisation	Linear 100:1
Thermal	
TEC	$\pm 14V$ 3.3A $Q = 34W$ standard
Sensor	NTC 10k $\Omega$
Cooling	Quick-fit water cooling, $\phi$ 6mm
Electronics	
Protection	Relay, reverse diode, photodiode cutout
Indicator	Laser ON/OFF (LED)
Connectors	DE9 (temperature control) and DE15 (current control)
Dimensions	
Dimensions	300 x 155 x 93mm (LxWxH)

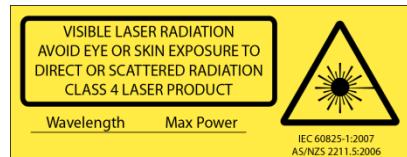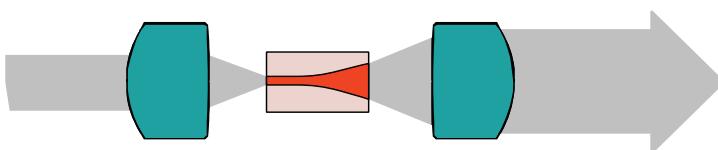

株式会社 ルクスレイ URL: <http://www.LxRay.jp> E-mail: [info@LxRay.jp](mailto:info@LxRay.jp)

関西本社 〒663-8113 兵庫県西宮市甲子園口3-28-22 TEL: 0798-31-0500, FAX: 0798-31-0505  
東京事務所 〒113-0033 東京都文京区本郷2-11-6 第1谷口ビル1F TEL: 03-3868-0200, FAX: 03-6912-6394