

# Twin DFB Laser




## Twin DFB Diode Laser

**Two wavelength laser source with internal superposition**

- Arbitrarily tunable beat note frequency
- Large tuning range up to 2 THz
- *FiberLock*® stabilized single-mode fiber coupling
- Optimized for cw THz generation

## Application example

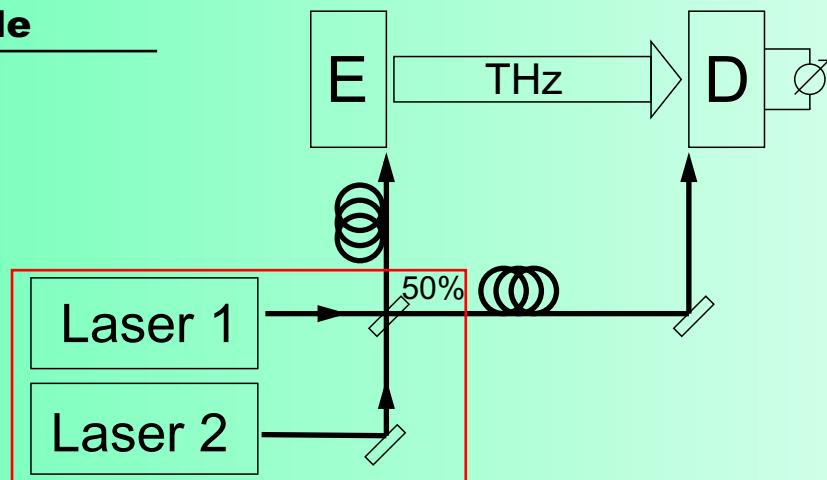


# Twin DFB Laser

## Principle of Operation


Superposition of two diode laser waves

The laser beams emitted from two distributed feedback laser diodes is superimposed and then coupled to a pair of single-mode fibers. The wavelengths of the individual lasers is measured and controlled by an iScan® interferometer head. An absolute spectroscopic wavelength reference CoSy® is available as an option.

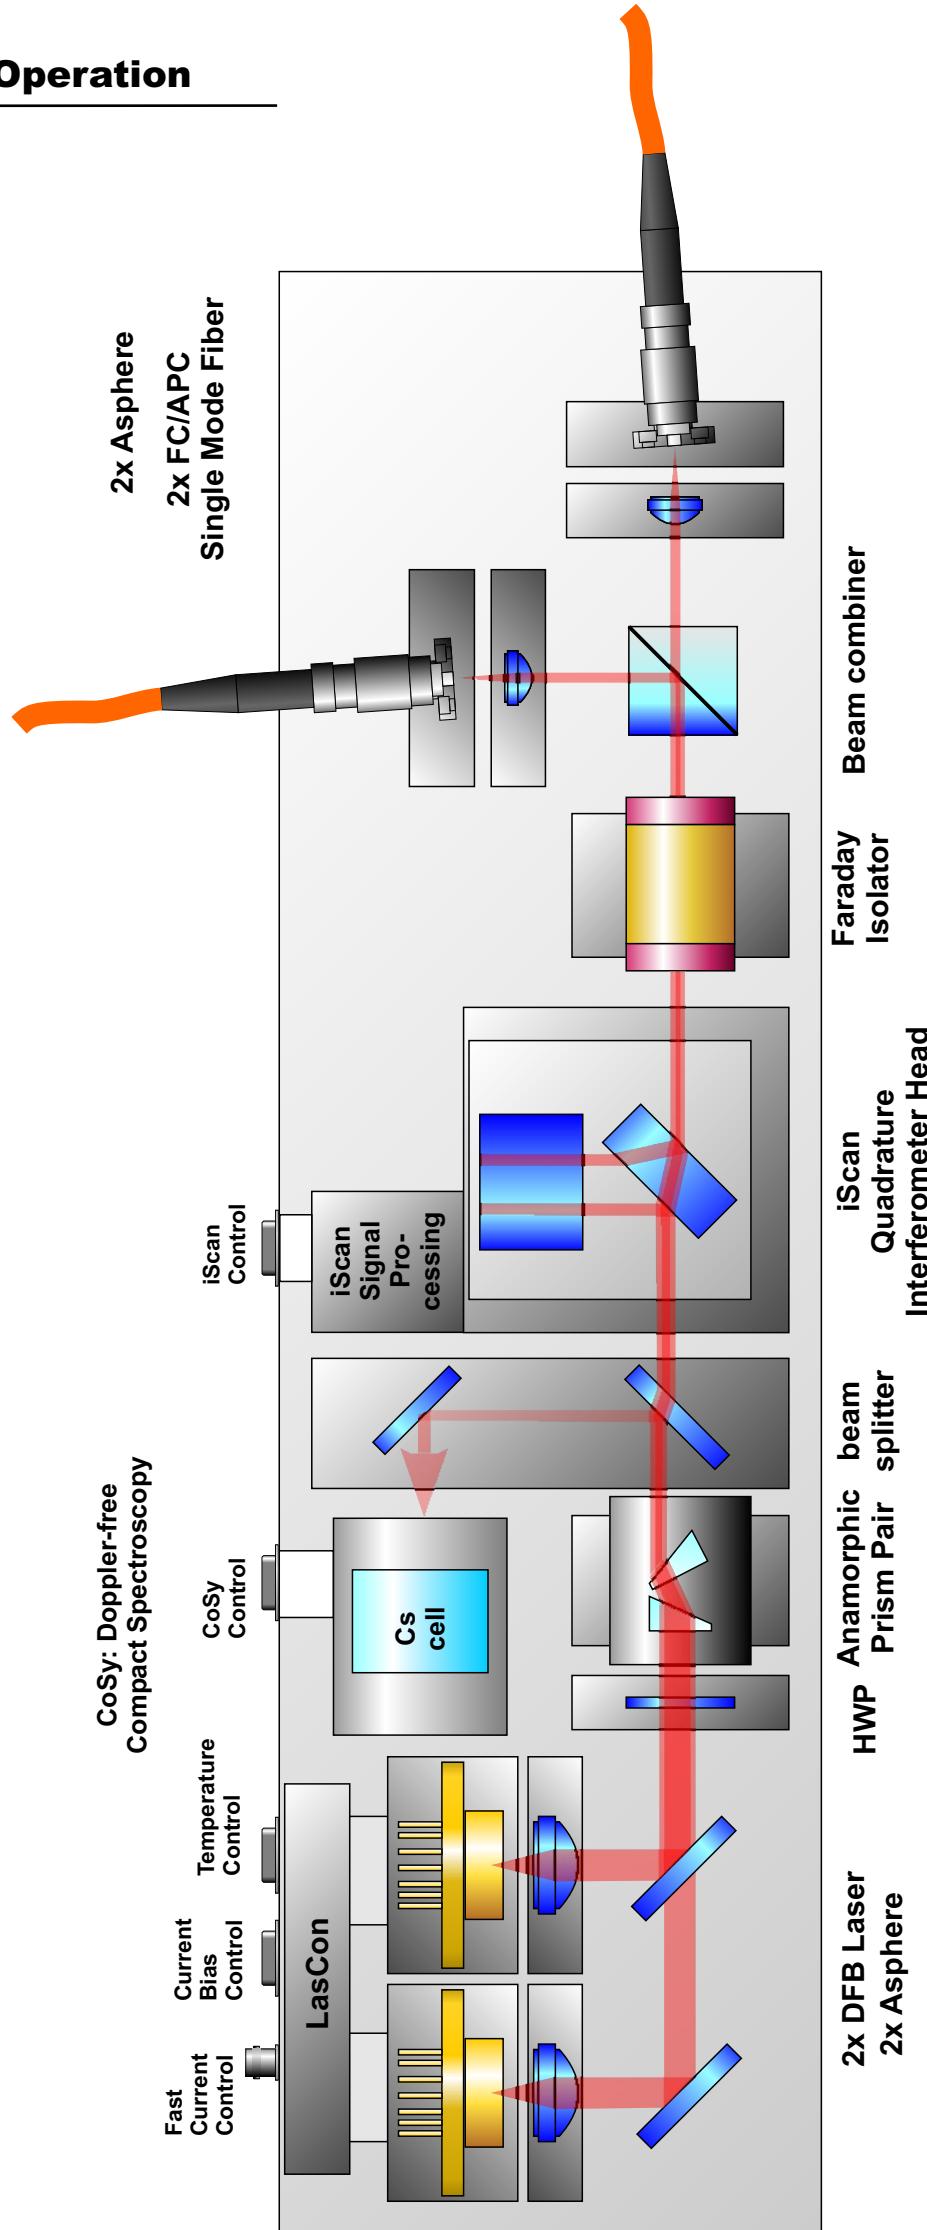

# Twin DFB Laser

## Driver & control unit

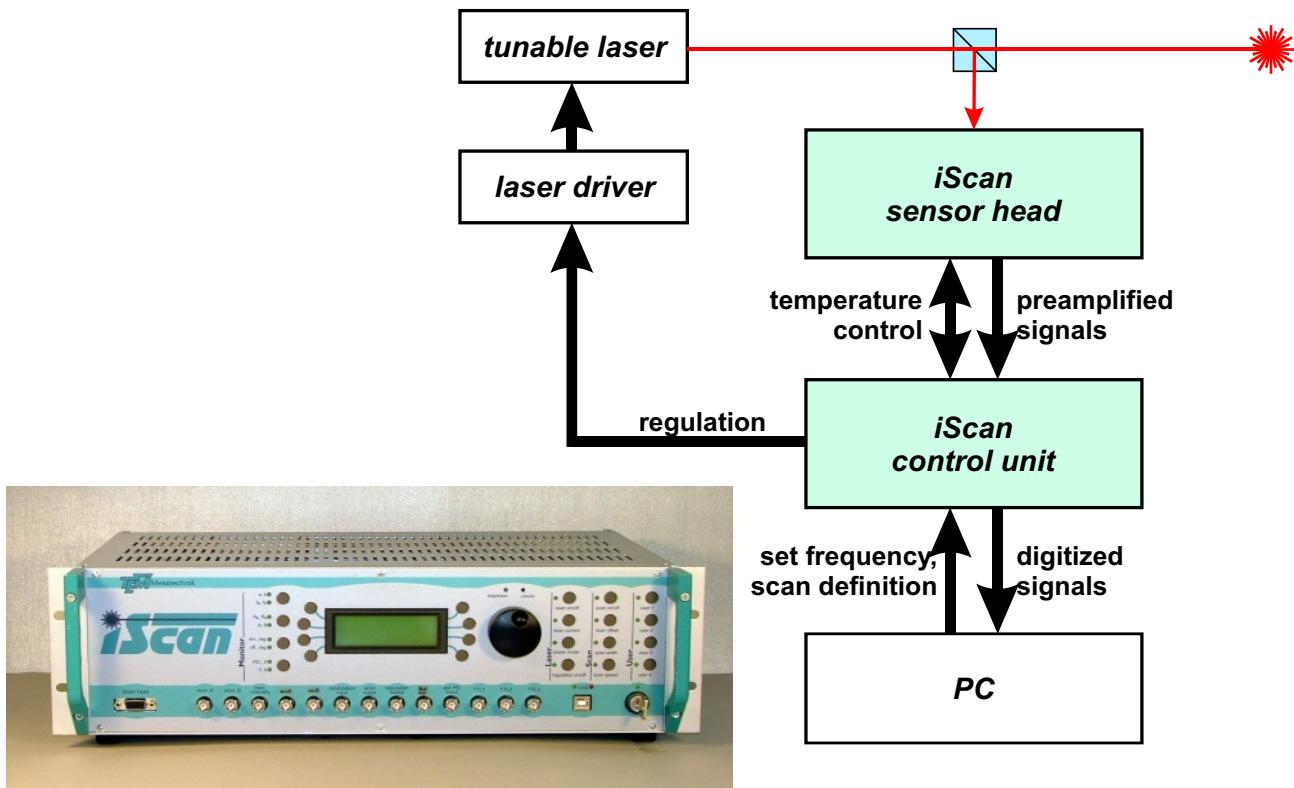

## Description

The driver unit is included in the iScan® control unit. It comprises two CCTC modules. Each module controls both laser current and temperature of one laser diode. The laser frequency tuning is accomplished by changing either the current (for fast but small steps) or the temperature (for large scans). The control unit is ready for remote control via RS-232 or USB.

For details concerning the frequency stabilization systems, please refer to the respective product information of iScan® and CoSy®.

## Product options

CoSy®:

Compact saturation spectroscopy module for absolute wavelength reference

## Technical Data (preliminary)

### Laser data:

Wavelength: selectable in the range 760nm ... 2740nm,  
Output power: 50mW per output at 853 nm  
Tuning range: typ. 1THz, (2THz at 853nm)

### Frequency stabilization:

Frequency resolution: 1 MHz  
Frequency stability: 10MHz per 10min, 100MHz per 8hrs.  
(please note that absolute stabilization is available  
as an option)

### Drivers:

Laser current range: 0..200mA (typ., others on request)  
Laser temperatur range: 0..70°C

### Housing (H x W x L):

*laser:* 100 mm x 250 mm x 400mm  
*driver:* 132 mm x 482 mm x 340 mm  
(19" standard, 2 height units)

**Power supply:** 100...120 VAC / 200...240 VAC, 50...60 Hz

Subject to change without notice.

## Development, Manufacturing and Distribution



株式会社 ルクスレイ

URL: <http://www.LxRay.jp> E-mail: [info@LxRay.jp](mailto:info@LxRay.jp)

関西本社 〒663-8113 兵庫県西宮市甲子園口3-28-22

TEL: 0798-31-0500, FAX: 0798-31-0505

東京事務所 〒113-0033 東京都文京区本郷2-11-6 第1谷口ビル1F

TEL: 03-3868-0200, FAX: 03-6912-6394

**TEM Messtechnik GmbH**  
**Grosser Hillen 38**  
**30559 Hannover**  
**Germany**

**tel. +49-511-51089630**  
**fax +49-511-51089638**  
**[info@tem-messtechnik.de](mailto:info@tem-messtechnik.de)**

**[www.tem-messtechnik.de](http://www.tem-messtechnik.de)**